



**Ultrasonic Thickness Gauge
AUT8500**



**Paperless Recorder
ARC900**



**Multi-Function Calibrator
ACA50**



**Multi-Function Calibrator
ACA60**



**Humidity and Temperature Transmitter
ARH950**



**Sanitary Type Ultrasonic Flowmeter
AUF770**



**Portable HART Communicator
AHT530**



**Smart HART Communicator
AHT520**




**Direct-Mount / Remote Diaphragm Seal
ADP-D**



**Flow Computer
AFC365**



**Ultrasonic Open Channel Flowmeter
AUF790**

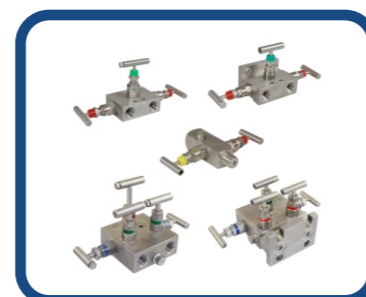

**2 / 3 / 5-Valve Manifolds
AHV400**



**Pressure Transmitter
APT3000**



**Ultrasonic Level Transmitter
AUL730**



**Smart Temperature Transmitter
ATT1000**



ALIA TECHNOLOGY LLC

Quality We Care!

ALIA TECHNOLOGY LLC

Tel: +1-213-533-4139

Fax: +1-213-223-2317

URL: www.alia-inc.com

Email: alia@alia-inc.com

633 W. 5th Street, 26th Floor, Los Angeles, CA 90071, USA



General List

	MAGMETER	VORTEX	SWIRL	THERMAL	ROTAMETER	CORIOLIS	OVAL GEAR	ULTRASONIC	TARGET	D/P
Model	AMF+AMC	AVF7000	ASF7100	ATF2000	AVF250	ACF6000	APF810	AUF750 / AUF610	ATF80	APT9000
Application	LIQUID	G / S / L	GAS	GAS	L / G / S	LIQUID	LIQUID	LIQUID	G / S / L	G / S / L
Size	1/4"-80"	3/8"-20"	1/2"-8"	3/8"-270"	1/2"-8"	1/2"-8"	1/2"-8"	1/2"-240"	1/2"-80"	1"-80"
Material	PTFE...	S.S. 316...	S.S. 316L...	S.S. 316L...	PTFE...	S.S. 316	S.S. 316...	More	Has. C...	S.S. 316...
Viscosity	NOT LIMITED	<10 cP	<10 cP	<10 cP	<300 cP	<100 cP	2-20000 cP	<100 cP	<50 cP	<10 cP
Main Display	TOT / FLOWRATE	TOTALIZER	TOT / FLOWRATE	FLOWRATE / TOT	FLOWRATE	TOT / FLOWRATE	TOTALIZER	FLOWRATE	FLOWRATE	FLOWRATE
Output	mA / PULSE	mA / PULSE	mA / PULSE	mA / PULSE	mA / PULSE	PULSE / mA	PULSE / mA	mA / PULSE	mA / PULSE	mA
Accuracy	0.2%-0.5% R	0.7%-1% R	1%-1.5% R	+/-1% R +/-0.5% FS	1%-1.6% FS	0.1%-0.2% R	0.2%-0.5% R	1%-2% R	1% R	2% R
Temperature	180 DegC	420 Deg C	80 Deg C	350 Deg C	400 Deg C	250 Deg C	250 Deg C	160 Deg C	450 Deg C	400 Deg C
Power Supply	AC / DC	24 VDC (2-Wire)	DC / BATTERY	AC / DC	DC / BATTERY	AC / DC	24 VDC (2-Wire)	AC / DC	24 VDC (2-Wire)	24 VDC (2-Wire)
	BATTERY	BATTERY			Mechanical		Mechanical	BATTERY		
Flow Direction	V / H	V / H	V / H	V / H	Vertical up	Horizontal	Horizontal	V / H	Horizontal	V / H
Limits	Must>5 us/cm	Must>3-5 m/sec	Hight Temperature	Dust / Wet	Vertical up	Price High	Low Viscosity	Accuracy	Price High	Installation
Pressure	350 kgf/cm ²	78 kgf/cm ²	63 kgf/cm ²	63 kgf/cm ²	40 kgf/cm ²	63 kgf/cm ²	63 kgf/cm ²	More	40 kgf/cm ²	40 kgf/cm ²
Connection	Flange / Wafer / BSPP	Flange / Wafer	Flange	Flange / Wafer / BSPP	Flange / Thread	Flange	Flange	Clamp-on	Flange	Flange
	Insertion / Tri-Clamp			Insertion / Tri-Clamp	Tri-Clamp				Insertion	Insertion
Turn Down Ratio	20:1	20:1	15:1	Over 100:1	10:1	20:1	10:1	10:1	10:1	10:1
Straight Pipe Distance	Upstream: >5D Downstream: >2D	Upstream: >18D Downstream: >5D	Upstream: >3D Downstream: >2D	Upstream: >10D Downstream: >5D	Upstream: >5D Downstream: >250 mm	Upstream: >0D Downstream: >0D	Upstream: >0D Downstream: >0D	Upstream: >10D Downstream: >5D	Upstream: >10D Downstream: >5D	Upstream: >15D Downstream: >5D